

# MISCELLANEOUS


## Consumer information

### STOPPING DISTANCE

These figures indicate braking performance that can be met or exceeded by the vehicles to which they apply. without locking the wheels. under different conditions of loading and with partial failures of the braking system The information presented represents results obtainable by skilled drivers under controlled road and vehicle conditions and the information may not be correct under other conditions.

Description of vehicles to which this table applies. Yamaha motorcycle XS850G

A. Fully Operational Service Brake

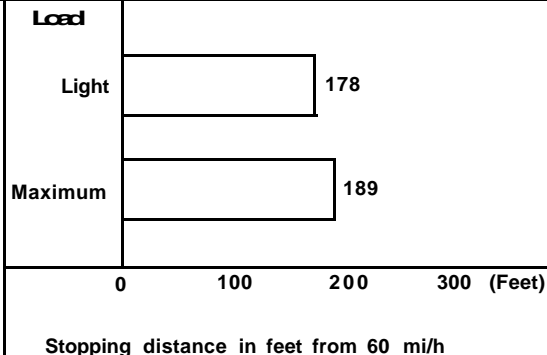

**NOTE:**

The statement above is required by U.S. Federal law.  
Partial failures of the braking system do not apply to this chart.

Stopping distance in feet from 60 mi/h

## ACCELERATION AND PASSING ABILITY

These figures indicate passing times and distances that can be met or exceeded by the vehicles to which they apply in the situations diagrammed below.

The low-speed pass assumes an initial speed of 20 mi/h and a limiting speed of 35 mi/h. The high-speed pass assumes an initial speed of 50 mi/h and a limiting speed of 80 mi/h.

**NOTICE:** The information presented represents results obtainable by skilled drivers under controlled road and vehicle conditions, and the information may not be correct under other conditions.


Description of vehicles to which this table applies Yamaha motorcycle XS850G

### Summary table

Low-speed pass .....351 feet: 7.1 seconds

High-speed pass ..... 868 feet: 8.1 seconds

### LOW-SPEED

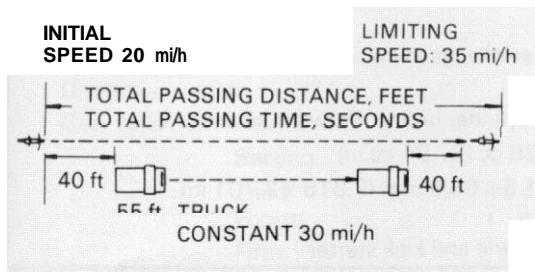

### HIGH-SPEED

